

Features


- Complies with IEEE 802.3, IEEE 802.3u, IEEE 802.3x and IEEE 802.3ab standards.
- 8 x Auto-Negotiation, Auto-MDI/MDIX ports provide smart switching between 10Mbps, 100Mbps and 1000Mbps hardware.
- Non-blocking switching architecture enables full wire-speed packets forwarding and filtering.
- Supports MAC address auto-learning and auto-aging.
- Energy-conserving design, saving up to 75% of the power.
- Fan-free design reduces noise and save energy.
- Plug and play simplifies installation.

AR-GS108

8-Port Gigabit Desktop Switch

Description

AR-GS108 is a multi-port switch which is the perfect choice to upgrade your previous network to gigabit speeds of 1000Mbps. Its eight Auto MDI/MDIX ports eliminate the need for crossover cables. Auto-negotiation on each port detects the link speed of a network device (10/100/1000Mbps) and intelligently adjusts for compatibility and optimal performance. Featuring non-blocking switching architecture, the product forwards and filters packets at full wire-speed for maximum throughput. IEEE 802.3x flow control for Full Duplex mode and backpressure for Half Duplex mode offer increased bandwidth to alleviate network congestion. Finally, the latest innovative energy-efficient technologies save up to 75% of the power consumption. It intelligently powers down unused ports or ports that connected to computers but have been shut down, and assigns different power output according to different cable lengths.

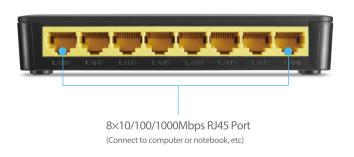



Specifications

General	
Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab,IEEE 802.3x
Protocol	CSMA/CD
Forwarding Performance	12Mpps
Transmission Method	Store-and-Forward
Switching Features	MAC Address Auto-learning and Auto-aging Half and Full Duplex 16Gbps Backplane Bandwidth
Hardware	
Interfaces	8 x 10/100/1000Base-T Port, 1 x Power Connector
LED Indicators	LAN1~LAN8, Power
Power Supply	External Power Adapter (Input: AC 100-240V, 50/60Hz, Output: DC 12V 0.5A)
MAC Address Table	8K entries per device
Dimensions (W x D x H)	139mm x 76mm x 25.2mm
Environment	
Operating Temperature	0°C~40°C (32°F~104°F)
Storage Temperature	-40°C~70°C (-40°F~158°F)
Operating Humidity	10%~90%, Non-condensing
Storage Humidity	5%~90%, Non-condensing
Certification	CE, RoHS

Package Contents	
Package Contents	1 x 8-Port Gigabit Desktop Switch 1 x Power Adapter 1 x Quick Installation Guide

AIRPHO TECHNOLOGY CO.,LTD www.airpho.com

Specifications are subject to change without notice. Airpho is a registered trademark of Airpho Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2018 Airpho Corporation. All rights reserved.